

**U.S. ARMY CORPS OF ENGINEERS
ROCK ISLAND DISTRICT**

**UPPER MISSISSIPPI RIVER SYSTEM
ENVIRONMENTAL MANAGEMENT PROGRAM**



**POST-CONSTRUCTION SUPPLEMENTAL
PERFORMANCE EVALUATION REPORT (PERS1)**

For

**BAY ISLAND HABITAT
REHABILITATION AND ENHANCEMENT**

**POOL 22, MISSISSIPPI RIVER MILES 311 - 312
MARION COUNTY, MISSOURI**

**APRIL 2002
8-YRS POST CONSTRUCTION**

EXECUTIVE SUMMARY

This is supplement 1 (PERS1) to the Bay Island Habitat Rehabilitation and Enhancement Project (HREP), Post-Construction Initial Performance Evaluation Report (PER) dated December 1999. Supplement 1 is a continuation of the initial 1999 Bay Island PER, with additional data collected and observed from January 2000 through March 2002, a period of approximately 2-years.

Concerns listed in the initial December 1999 PER were addressed through a new construction contract substantially completed in the fall of 2000. The following new features and maintenance items added under the construction contract include: (1) overflow spillways to both the North and South Wetland Management Units; (2) riprap slope protection on the northwest corner of the perimeter levee; (3) bentonite lining installed in the existing water supply ditch; (4) clay fill to raise the water supply berm and a new gatewell on the water supply berm; (5) and a new sluice closure gate to seal off the intake of the existing pump station.

The new features and maintenance items mentioned above address the concerns and problems mentioned in the initial 1999 Bay Island PER. Overflow spillways on the North and South Wetland Management Units (WMUs) minimized levee damages resulting from the most recent 2001 flood event that was the third highest flood event recorded at this location. The spillways eliminate the need for timely removal of stoplog structures that proved historically problematic. Riprap protection along the corner of the northwest levee also functioned as planned, eliminating erosion problems stemming from Clear Creek and the South River Levee and Drainage District pump discharges. Initially after its construction, the bentonite lining in the water supply ditch appeared to have significantly reduced the seepage problem that existed in the South Wetland Management Unit however, subsequent filling has resulted in significant dropping of water levels in the South WMU during November and December of 2001. The pumping additional water in to the South WMU was tried but the end result was a continual drop in the water level. Clay fill and a new gatewell placed on the existing water supply berm now allow independent operation of the North and South WMUs. Installation of a new sluice closure gate at the pump station is preventing sediment build up in the intake area of the pump station that previously was problematic. Since installation of the new sluice closure gate, there have been no electrical problems operating the intake pump.

The majority of the maintenance items and construction of the new features appears to have been successful in remedying problems associated with the original construction of the project, with the exception of the bentonite lining. The bentonite lining now appears to not have been successful in preventing the water seepage that is occurring out of the South WMU and adjoining water supply ditch. Long-term results will continue to be monitored and evaluated, with the features incorporated on other EMPs if successful. Root pruned method (RPM) plantings continue to do very well. MDOC is continuing efforts to get other areas established in mast trees and vegetation as called out in the site manager's inspection reports. A good stand of smartweed and barnyard grass has been observed in the open areas of the South WMU.

**Bay Island
Performance Evaluation
Points of Contact**

[Please furnish any comments on this report to Kirk Sunderman]

U.S. Army Corps of Engineers, Rock Island District

Name	Position	Address	City	State	Zip	Telephone	Email
Kirk Sunderman	Project Engineer	Clock Tower Building	Rock Island	IL	61204-2004	309-794-5140	Kirk.J.Sunderman@usace.army.mil
Roger Perk	Program Manager	Clock Tower Building	Rock Island	IL	61204-2004	309-794-5475	Roger.A.Perk@usace.army.mil
Gary Swenson	Forestry	Clock Tower Building	Rock Island	IL	61204-2004	309-794-4489	Gary.V.Swenson@usace.army.mil
Charlene Carmack	Biologist	Clock Tower Building	Rock Island	IL	61204-2004	309-794-5570	Charlene.Carmack@usace.army.mil

U.S. Fish and Wildlife Service

Name	Position	Address	City	State	Zip	Telephone	Email
Dick Steinbach	Wildlife Refuge Manager	1704 North 24 th Street	Quincy	IL	63201	217-224-8580	Dick_Steinbach@fws.gov
Karen Westphal	EMP Coordinator	1704 North 24 th Street	Quincy	IL	63201	217-224-8580	Karen_Westphal@fws.gov

Missouri Department of Conservation

Name	Position	Address	City	State	Zip	Telephone	Email
Gary Christoff	HREP Coordinator	P.O. Box 180	Jefferson City	MO	65102	573-751-4115	chrisg@mail.conservations.state.mo.us
Keith Jackson	Site Manager	653 Clinic Road	Hannibal	MO	63401	573-248-2530	jacksk@mail.conservations.state.mo.us
Sean Cleary	Wildlife Biologist	P.O. Box 201	Elsberry	MO	63343	573-898-5905	

BAY ISLAND REHABILITATION AND ENHANCEMENT

Construction Completed November 1994

Preface

This project was authorized, designed, and constructed as part of the Upper Mississippi River Environmental Management Program (UMR-EMP, PL 99-662). The program, as administered by the U.S. Army Corps of Engineers, authorizes "... the planning, construction and evaluation of measures for fish and wildlife habitat rehabilitation and enhancement..."

Once EMP projects are planned, designed, and constructed, they are operated and maintained by the Project Sponsor in accordance with Project Cooperation Agreements (for Non-Federal Sponsors) or Memorandums of Agreement (for Federal Sponsors).

Post-construction project monitoring was authorized by the EMP in efforts to validate project goals and objectives against physical, chemical, and biological aspects of the project. Post-construction monitoring also provides a systematic basis for project review of planning, design and construction principles, operation and maintenance considerations and natural resource management viewpoints.

Post-construction performance evaluations are performed each year and put out as a report, called a Post-Construction Performance Evaluation Report (PER). Principal agencies involved include the Sponsor, the U.S. Fish and Wildlife Service, U.S. Geological Survey, State Resource Agencies, and the U.S. Army Corps of Engineers. Principal components of the PER include inspections and observations, field sampling and evaluation of data relative to project goals and objectives. Field data is collected according to an established project monitoring plan presented in the PER.

The Post-Construction PER is either published as a separate report or as a supplement to previous reports. Supplements are utilized when monitoring/project data do not warrant full evaluations and analyses.

Previous Performance Evaluation Reports (PERs), including the project monitoring plan, and other related project documents such as the Definite Project Report (DPR) and the project Operation and Maintenance (O&M) Manual with as-built construction drawings are available at: <http://www.mvr.usace.army.mil/EMP/hrep.htm>.

TABLE OF CONTENTS

1. INTRODUCTION.....	1
a. Purpose	1
b. Scope	1
c. Previous Performance Evaluation Reports.....	1
2. PROJECT GOALS AND OBJECTIVES	1
a. General.....	1
b. Goals and Objectives	1
c. Management Plan	2
3. PROJECT DESCRIPTION	2
a. Project Features.....	2
b. Project Construction.....	2
c. Project Operation and Maintenance.....	2
4. PROJECT MONITORING	3
a. General.....	3
b. U.S. Army Corps of Engineers.....	3
c. U.S. Fish and Wildlife Service.....	3
d. Missouri Department of Conservation.....	3
5. EVALUATION OF PROJECT OBJECTIVES	4
a. Provide Controlled Water Levels During Waterfowl Migration and Increase Reliable Food Production Area	4
b. Increase Mast Tree Dominance-Forested Wetland	4
c. Increase Total Wetland Values for Waterfowl.....	5
d. Aquatic Habitat Objectives	5
6. EVALUATION OF PROJECT OPERATION AND MAINTENANCE	5
a. Water Control Structures.....	5
b. Pump Station.....	6
c. Wetland Management Units (WMU).....	6
d. Perimeter Levee	7
e. Mast-Tree Plantings and Permanent Vegetative Cover	7
7. GENERAL CONCLUSIONS AND RECOMMENDATIONS.....	8
a. Level of Protection	8
b. Water Supply System	8
c. Water Control Structures.....	8
d. Mast Tree Plantings.....	8
e. Site Access	8

APPENDICIES

APPENDIX A – COOPERATING AGENCY CORRESPONDENCE

APPENDIX B – REFERENCES

APPENDIX C – DISTRIBUTION LIST

APPENDIX D – PLATES

PLATES

PLATE 1 – Location Plan & Vicinity Map

PLATE 2 – Site Plan/Project Features

PROJECT BACKGROUND

1. INTRODUCTION

The Bay Island, Missouri, Habitat Rehabilitation and Enhancement project, hereafter referred to as “the Bay Island project” was completed as part of the ongoing Upper Mississippi River System (UMRS) Environmental Management Program (EMP). The Bay Island project is located approximately 1 mile north of Hannibal, Missouri. (see plate 1).

a. Purpose. The purposes of this report are as follows:

- (1) Summarize the performance of the Bay Island HREP through a supplement to the initial 1999 report based on project goals and objectives.
- (2) Review the monitoring plan for possible revisions.
- (3) Summarize project operation and maintenance efforts to date.
- (4) Review engineering performance criteria to aid in the design of future projects.

b. Scope. This supplemental report summarizes available project monitoring data, inspection records, and observations made by the U.S. Army Corps of Engineers (Corps) and the Missouri Department of Conservation (MDOC) for the period from March 1987 through March 2002. Initial project construction was completed in the fall of 1994.

c. Previous Performance Evaluation Reports. The Initial Performance Evaluation Report was completed in December 1999.

2. PROJECT GOALS AND OBJECTIVES

a. General. The Bay Island HREP was constructed to provide high quality, dependable wetland habitat for migratory waterfowl. Water level management capabilities were achieved through the construction of a levee system, pump station, and water control structures. Construction of the levee system created two independent wetland management units (WMUs). A pump station and multiple stoplog structures were built into the levee system to facilitate control of water levels. Mast producing trees were planted to provide additional food resources. Overflow spillways, riprap protection, bentonite lining to reduce seepage, and a gatewell structure were added to the wetland management units in the fall of 2000 to increase water control and reduce flood damage impacts. A new sluice closure gate at the pump station was added to reduce sediment build up in the pumping pit.

b. Goals and Objectives. Project goals and objectives were formulated during the project design phase and are summarized in Table 2-1.

Table 2-1 Project Goals and Objectives		
Goals	Objectives	Project Features
Enhance Wetland Habitat for Migratory Waterfowl	Provide controlled water levels during waterfowl migration—forested and non-forested. Increase reliable food production area (moist-soil species).	Earthen levee, pump station, stoplog structured, sluice gate, bentonite lining
	Increase mast tree dominance—forested wetland	Mast tree plantings including seedlings and acorns
	Increase total wetland values for migratory waterfowl	All project features are intended to enhance wetland values

c. Management Plan. No formal management plan was developed for this project. The project is generally operated as outlined in the *Bay Island Operation and Maintenance Manual* dated November 1995 (see references).

3. PROJECT DESCRIPTION

a. Project Features. New features and maintenance items were added to the original project through a construction contract substantially completed in the fall of 2000. New features include overflow spillways, a new gatewell on the water supply berm and a new sluice closure gate installed on the pump station. Maintenance items include the riprap slope protection added to the perimeter levee, bentonite lining installed in the water supply ditch, and clay fill added to raise the water supply berm. For original project features, see the Bay Island, December 1999 Post-Construction Initial Performance Evaluation Report (PER).

b. Project Construction. New features and maintenance items were addressed through a construction contract awarded on 18 April, 2000. The contract was awarded to Gunterman Brothers, Inc. for \$372,724 under solicitation number DACW25-00-B-0007. The construction contract number was DACW25-00-C-0010. Construction was considered substantially completed in the fall of 2000.

c. Project Operation and Maintenance. No new information. See initial 1999 PER.

4. PROJECT MONITORING

a. General. No new information. See the Bay Island, December 1999 Post-Construction Initial Performance Evaluation Report for the Monitoring and Performance Evaluation and Data Collection Summary.

b. U.S. Army Corps of Engineers. No new information. See sections 5 & 6, below.

c. U.S. Fish and Wildlife Service. No new information.

d. Missouri Department of Conservation. No new information. See appendix A, Site Manager's Inspection Results and sections 5 & 6, below.

PROJECT MONITORING RESULTS

Project Goals and Objectives			
Goals	Objectives	Project Features	Status
Enhance Wetland Habitat for Migratory Waterfowl	Provide controlled water levels during waterfowl migration—forested and non-forested. Increase reliable food production area (moist-soil species).	Earthen levee, pump station, stoplog structures, sluice gate, bentonite lining	Most met with Lining being monitored Silt build up at pump station being monitored
	Increase mast tree dominance—forested wetland	Mast tree plantings including seedlings and acorns	Met
	Increase total wetland values for migratory waterfowl	All project features are intended to enhance wetland values	

5. EVALUATION OF PROJECT OBJECTIVES

a. Provide Controlled Water Levels During Waterfowl Migration and Increase Reliable Food Production Area. Concerns listed in the 1999 PER were addressed through a construction project in the fall of 2000. Limited water control occurred during the fall of 2000 as a result of the construction activities.

Construction activities resulted in the following: (1) the two wetland management units (WMUs) can now be independently operated; (2) silt build up in the pumping pit of the pump station was greatly reduced and all but eliminated; (3) seepage from the water supply ditch and the South WMU was initially reduced, but now appears to have not been successful due to significant drops in the water level in the South WMU during November and December of 2001; (4) and no activities took place to increase reliable food sources over this evaluation period, although considerable time was spent in mowing maple, cottonwood and willow invasion. It was noted that excellent stands of smartweed and barnyard grass exist in the open areas of the South WMU.

b. Increase Mast Tree Dominance – Forested Wetland. The Missouri Department of Conservation (MDOC) planted new trees in 2000. Tree berms in the South WMU were planted with root pruned method (RPM) trees, along side one hundred (100) two-year old bare root stock seedlings. This will provide a direct comparison between the two types of tree plantings under similar wetland planting situations. The flood of 2001 seemed to have not affected the South WMU tree berms, but the bare root stock seedlings seemed to have not fared as well. A better estimate of tree survival will be made after the spring 2002 growing season.

c. Increase Total Wetland Values for Waterfowl. Little waterfowl usage was observed in the fall of 2000, possibly due to construction delaying the filling of the WMUs. Very little waterfowl usage was observed in the fall of 2001, especially after mid-November.

d. Aquatic Habitat Objectives. Aquatic objectives were not monitored for this project.

6. EVALUATION OF PROJECT OPERATION AND MAINTENANCE

Observations and conclusions of the project's operation and maintenance based on annual and joint inspections are given below for a report period of January 2000 to March 2002. For observations and conclusions of the project's operation and maintenance for the period from March 1987 to January 1999, reference the Bay Island, December 1999 Post-Construction Initial Performance Evaluation Report.

a. Water Control Structures. Since the initial 1999 PER, two overflow spillways were added to the project in the fall of 2000 as recommended in the 1999 PER. The addition of overflow spillways has allowed controlled filling of the wetland management units and minimized damages from flooding on the Mississippi River. The 2001 flood caused little to no damage to the Bay Island EMP project.

(1) Challenges or Difficulties. The wood stoplog structures continue to be an operational problem. Many of the stoplogs have warped to the point of being unusable. Also, it was noted that the transition from the levee crest down to the overflow spillway crest was too abrupt of a transition at a 10% slope. A passenger car may not have enough clearance to pass over the transition without getting hung up.

(2) Actions and Recommendations. MDOC desires to retrofit each of the two perimeter water control structures with one sluice gate and to permanently close off the remaining three bays at each water control structure. The retrofit would entail placement of a 5-foot wide sluice gate in one of the existing four stoplog bays. If MDOC desires to permanently close off the remaining three stoplog bays, it is recommended that the wood stoplogs be replaced with a more permanent, yet still removable material, such as steel plates. Consideration should be given to leaving the existing wood stoplogs in place until they become deteriorated to the point of having significant leakage. The addition of the overflow spillways was a success during the flood of 2001 and will continue to be monitored. Nothing will be done about the 10% slope transition from the levee crest to the spillway crest.

b. Pump Station. Since the initial 1999 PER, the pump station has operated with no reported electrical problems. As recommended in the 1999 PER, a sluice closure gate was placed on the intake opening of the pump station in the fall of 2000 to seal off the pumping pit from sediment that historically built up during most of the year, when the pump station is not being operated. A ladder and platform were also added in the fall of 2000 to facilitate the cleaning out of any sediment that may develop in the pumping pit.

(1) Challenges or Difficulties. Concern remains about not having a guard in front of the pump intake to prevent the build up of leaves. Also, there is some concern about the build up of sediment that will collect on the outside of the sluice closure gate.

(2) Actions and Recommendations. Recommend that the pump station be operated under the present conditions for the next few years to see if these conditions create an operational problem. Sealing off the pump pit should prevent the impellers of the pump from getting locked in by silt. Once the pump is started, it should be able to agitate nearby sediment and small debris. The pump is designed to operate under heavy sediment conditions. Leaves should be monitored and cleaned out as needed if they continue to build up and block off water to the intake.

c. Wetland Management Units (WMU). Since the initial PER, the water supply ditch in the South WMU was lined with bentonite, additional height was added to the water supply berm, and a new gatewell was placed on the water supply berm. The added height to the supply berm and new gatewell has allowed separate operation of the WMUs.

(1) Challenges or Difficulties. Prior to the bentonite lining, significant seepage was occurring in the South WMU. Initial operation of the South WMU after the addition of bentonite appeared to have greatly reduced the amount of water loss, but a substantial drop of water level was noted during November and December of 2001 with the unit essentially dry at the time of inspection.

(2) Actions and Recommendations. Continue to monitor and record seepage rates out of the South WMU. Try to identify where water is seeping out. Over time, it is hoped that sediment deposition in the WMU will begin to seal off the seepage areas.

d. Perimeter Levee. Since the initial PER, riprap was placed along the northwestern edge of the perimeter levee to protect against erosion that was occurring from Clear Creek. The installation of riprap has proven successful, sustaining no damage from the flood of 2001.

(1) Challenges or Difficulties. The South River Levee and Drainage District claims that the perimeter levee of the Bay Island project creates higher discharge heads for their pump station. This claim has been reported several times during annual levee inspections since 1993. The South River Levee and Drainage District has provided no data to substantiate this claim.

(2) Actions and Recommendations. Continue to monitor the perimeter levee for erosion problems. Coordination is ongoing for the Corps of Engineers to review South River Levee and Drainage District's claims. A site investigation was made in November 2001 that resulted in a memorandum of record that is going through review at the Rock Island District. Once it is determined, a formal statement on the Rock Island District's position will be documented and provided to the South River Levee and Drainage District.

e. Mast-Tree Plantings and Permanent Vegetative Cover. Since the initial PER, construction activities have stripped vegetative cover from portions of the levee, water supply ditch, berm and areas around the overflow spillways that were subsequently reseeded. See Appendix A for ongoing MDOC efforts in the site manager's report.

(1) Challenges or Difficulties. Flooding events have hampered the overall success of mast-tree plantings and vegetative covers. Weed control mats placed by the MDOC collected excessive sediment during the 2001 flood event, thus eliminating their usefulness.

(2) Actions and Recommendations. Efforts by the MDOC to establish more mast-trees and permanent vegetative cover are encouraged.

7. GENERAL CONCLUSIONS AND RECOMMENDATIONS

a. Level of Protection. The perimeter levee, as originally built, protected against a 2-year flood event, even though recommendations have been made for other projects to increase the level of protection to a 5-year flood event to reduce the rate of siltation that slowly fills in the protected managed areas. The addition of overflow spillways lowered the level of protection of the perimeter levee at Bay Island by 1-foot, however, the spillways installed have proved to be successful in preventing damage that historically occurred during previous overtopping events. It is recommended that performance of these spillways be monitored for their effectiveness of preventing damage during future overtopping events. Consideration should be given to utilization of overflow spillways in future projects while using a 5-year level of protection. Overflow spillways require no operation efforts to be effective, unlike stoplog structures.

b. Water Supply System. The sluice closure gate installed at the pump station has assisted in keeping silt levels in the pumping pit at a minimum, thus allowing the pump to operate more efficiently. Monitoring through inspections of this feature will continue.

c. Water Control Structures. The clay fill and gatewell place on the water supply berm have assisted in the control of water levels in the WMUs, although seepage from the South WMU due to the failure of the bentonite lining will need to be addressed. Monitoring through inspections of these features will continue.

d. Mast Tree Plantings. Existing mast-tree plantings will continue to be monitored with the MDOC continuing to prepare for additional mast-tree plantings.

e. Site Access. Options for elevating the access bridge were investigated and it was determined raising the bridge would not be feasible. At one time, stoplogs needed to be removed from the water control structures before floodwaters overtopped the access bridge. Construction of the overflow spillways have alleviated the need for timely removal of the stoplogs in the water control structures and thus have eliminated the need to access the perimeter levee and water control structures by vehicle during a flood event.

APPENDIX A

Cooperating Agency Correspondence

**BAY ISLAND REHABILITATION AND ENHANCEMENT
OPERATION AND MAINTENANCE MANUAL**

**UPPER MISSISSIPPI RIVER ENVIRONMENTAL MANAGEMENT PROGRAM
POOL 22, RIVER MILES 311 THROUGH 312
MARION COUNTY, MISSOURI**

SITE MANAGER’S PROJECT INSPECTION AND MONITORING RESULTS

Inspected By Keith Jackson Date 3-15-2001

Type of Inspection: (XX) annual () emergency-disaster () other

1. PROJECT INSPECTION

<u>Item</u>	<u>Condition</u>
a. <u>Perimeter Levee</u>	
(XX) Settlement, sloughs or loss of section	<u>Fine, none noted</u>
(XX) Wavewash, scouring	<u>Erosion noted in earlier report, **</u>
(XX) Overtopping erosion	<u>No</u>
(XX) Vegetative cover (mowing)	<u>Mowed, plan to reseed this spring or fall</u>
(XX) Burrowing animals	<u>No</u>
(XX) Unauthorized grazing or traffic	<u>No</u>
(XX) Encroachments	<u>No</u>
(XX) Unfavorable tree/shrub growth	<u>No</u>
	**rip rap placed along this area this summer by COE contractor.
b. <u>Intermediate Levee</u>	
(XX) Settlement, sloughs or loss of section	<u>No</u>
(XX) Wavewash, scouring	<u>None noted</u>
(XX) Overtopping erosion	<u>No</u>
(XX) Vegetative cover (mowing)	<u>Mowed, plan to reseed due to lack of perennial grass</u>
(XX) Burrowing animals	<u>No</u>
(XX) Unauthorized grazing or traffic	<u>No</u>
(XX) Encroachments	<u>No</u>
(XX) Unfavorable tree/shrub growth	<u>No</u>
c. <u>Water Control Structure-North Perimeter Levee</u>	
(XX) Stoplogs, stoplog keepers, stoplog slots	<u>Okay, stoplogs are warping–some need replacing</u>
(XX) Concrete	<u>Good</u>
(XX) Steel rails, rail posts, grating, fasteners	<u>Good</u>
(XX) Displaced/missing riprap	<u>No</u>
(XX) Inlet and outlet channels	<u>Fine, little evidence of erosion.</u>
(XX) Erosion adjacent to structure	<u>Very little</u>
(XX) Sedimentation (culverts/approaches)	<u>Very little, mostly by beavers</u>

Item

Condition

d. Water Control Structure-South Perimeter Levee

(XX) Stoplogs, stoplog keepers, stoplog slots	<u>Good, same as item 'c.'</u>
(XX) Concrete	<u>Okay</u>
(XX) Steel rails, rail posts, grating, fasteners	<u>Okay</u>
(XX) Displaced/missing riprap	<u>No</u>
(XX) Inlet and outlet channels	<u>Fine</u>
(XX) Erosion adjacent to structure	<u>No</u>
(XX) Sedimentation (culverts/approaches)	<u>Little, mostly by beavers</u>

e. Water Control Structure-Intermediate Levee

(XX) Stoplogs, stoplog keepers, stoplog slots	<u>Good. Smaller logs holding up better than others</u>
(XX) Concrete	<u>Fine</u>
(XX) Steel rails, rail posts, grating, fasteners	<u>Fine</u>
(XX) Displaced/missing riprap	<u>No</u>
(XX) Inlet and outlet channels	<u>Fine</u>
(XX) Erosion adjacent to structure	<u>No</u>
(XX) Sedimentation (culverts/approaches)	<u>No</u>

f. Flood/Drainage Ditch

(XX) Debris	<u>Little, requires annual removal here and along levees</u>
(XX) Unauthorized structures	<u>No</u>
(XX) Bank erosion	<u>No</u>

g. Pump Station

(XX) Structure - steel	<u>Okay</u>
(XX) Structure - concrete	<u>Good</u>
(XX) Structure - wood	<u>Okay, but wobbly</u>
(XX) Displaced/missing riprap	<u>No</u>
(XX) Electrical controls	<u>Fine, no problems this year</u>
(XX) Steel discharge pipe/flapgate	<u>Fine</u>
(XX) Forebay/sump (sedimentation)	<u>Considerable, both in sump and in front.</u>

h. Vegetation

(XX) Mast Trees	<u>Very good. Mowed for weed control</u>
(XX) Seeding	<u>Acorn planting failed, seedling planting in poor shape. Considerable maple/cottonwood invasion</u>

i. Access

(XX) Bridge	<u>Good</u>
(XX) Road - granular surfacing, etc.	<u>Fine</u>
(XX) Piers - riprap	<u>Fine</u>

2. COMMENTS.

Installation of gate at pump sump, coupled with ladder and platform within the sump, should greatly reduce the sedimentation problem within the sump. If it does occur, the platform will greatly ease the process of removal. The front of the sump will continue to be something of a problem, but no easy solutions and may be able to operate with little or no clean-out.

Ran the pump a limited amount this year due to contractor delays with the rehab project due to weather. No problems reported with electrical connections. Guard to prevent the buildup of leaves was not constructed, but still needed. Pump was operated a total of 340.1 hours.

Excellent stand of smartweed in the open areas of the south management unit (SMU). Little waterfowl usage observed in the fall—mainly due to late timing of flooding. Tree berms in the SMU were planted to root pruned method (RPM) trees this fall. We also planted 100 two-year old bare root stock seedlings as a comparison between these “super-seedlings” from our state nursery with RPM seedlings under similar wetland planting situations.

It appears that the bentonite blanket installed in the water supply ditch has greatly reduced water loss noted in previous years for the SMU.

Management plans for 2001 include reseeding levees with redtop, including the recently constructed water supply berm; using a heavy brush-cutter to reduce woody competition in the original seedling planting, and also to knock back buttonbush/willow invasion around some of the wooded sloughs; establishing/maintaining ladino/alsike clover plantings; and hopefully establishing around five acres of corn/milo food plots.



Keith Jackson
Site Manager

**BAY ISLAND REHABILITATION AND ENHANCEMENT
OPERATION AND MAINTENANCE MANUAL**

**UPPER MISSISSIPPI RIVER ENVIRONMENTAL MANAGEMENT PROGRAM
POOL 22, RIVER MILES 311 THROUGH 312
MARION COUNTY, MISSOURI**

SITE MANAGER'S PROJECT INSPECTION AND MONITORING RESULTS

Inspected By Keith Jackson Date 3-1-2002

Type of Inspection: (XX) annual () emergency-disaster () other

1. PROJECT INSPECTION

<u>Item</u>	<u>Condition</u>
a. <u>Perimeter Levee</u>	
(XX) Settlement, sloughs or loss of section	<u>Fine, none noted</u>
(XX) Wavewash, scouring	<u>Minor, from overtopping this year</u>
(XX) Overtopping erosion	<u>No</u>
(XX) Vegetative cover (mowing)	<u>Mowed, plan to reseed this spring or fall</u>
(XX) Burrowing animals	<u>No</u>
(XX) Unauthorized grazing or traffic	<u>No</u>
(XX) Encroachments	<u>No</u>
(XX) Unfavorable tree/shrub growth	<u>No</u>
b. <u>Intermediate Levee</u>	
(XX) Settlement, sloughs or loss of section	<u>No</u>
(XX) Wavewash, scouring	<u>None noted</u>
(XX) Overtopping erosion	<u>No</u>
(XX) Vegetative cover (mowing)	<u>Mowed, plan to reseed due to lack of perennial grass</u>
(XX) Burrowing animals	<u>No</u>
(XX) Unauthorized grazing or traffic	<u>No</u>
(XX) Encroachments	<u>No</u>
(XX) Unfavorable tree/shrub growth	<u>No</u>
c. <u>Water Control Structure-North Perimeter Levee</u>	
(XX) Stoplogs, stoplog keepers, stoplog slots	<u>Okay, stoplogs are warping--some need replacing</u>
(XX) Concrete	<u>Good</u>
(XX) Steel rails, rail posts, grating, fasteners	<u>Good</u>
(XX) Displaced/missing riprap	<u>No</u>
(XX) Inlet and outlet channels	<u>Fine, little evidence of erosion.</u>
(XX) Erosion adjacent to structure	<u>Very little</u>
(XX) Sedimentation (culverts/approaches)	<u>Very little, mostly by beavers.</u>

Item

Condition

d. Water Control Structure-South Perimeter Levee

(XX) Stoplogs, stoplog keepers, stoplog slots	<u>Good, same as item 'c.'</u>
(XX) Concrete	<u>Okay</u>
(XX) Steel rails, rail posts, grating, fasteners	<u>Okay</u>
(XX) Displaced/missing riprap	<u>No</u>
(XX) Inlet and outlet channels	<u>Fine</u>
(XX) Erosion adjacent to structure	<u>No</u>
(XX) Sedimentation (culverts/approaches)	<u>Little, mostly by beavers</u>

e. Water Control Structure-Intermediate Levee

(XX) Stoplogs, stoplog keepers, stoplog slots	<u>Good. Smaller logs holding up better than others</u>
(XX) Concrete	<u>Fine</u>
(XX) Steel rails, rail posts, grating, fasteners	<u>Fine</u>
(XX) Displaced/missing riprap	<u>No</u>
(XX) Inlet and outlet channels	<u>Fine</u>
(XX) Erosion adjacent to structure	<u>No</u>
(XX) Sedimentation (culverts/approaches)	<u>No</u>

f. Flood/Drainage Ditch

(XX) Debris	<u>Little, requires annual removal here and along levees</u>
(XX) Unauthorized structures	<u>No</u>
(XX) Bank erosion	<u>No</u>

g. Pump Station

(XX) Structure - steel	<u>Okay</u>
(XX) Structure - concrete	<u>Good</u>
(XX) Structure - wood	<u>Okay, but wobbly</u>
(XX) Displaced/missing riprap	<u>No</u>
(XX) Electrical controls	<u>Fine, no problems this year.</u>
(XX) Steel discharge pipe/flapgate	<u>Fine</u>
(XX) Forebay/sump (sedimentation)	<u>Entry into sump getting shallow, but sump okay.</u>

h. Vegetation

(XX) Mast Trees	<u>Very good. Mowed for weed control</u>
(XX) Seeding	<u>Acorn planting failed, seedling planting in poor shape. Considerable maple/cottonwood invasion.</u>

i. Access

(XX) Bridge	<u>Good</u>
(XX) Road - granular surfacing, etc.	<u>Fine</u>
(XX) Piers - riprap	<u>Fine</u>

2. COMMENTS.

Installation of gate at pump sump achieved desired result of all but eliminating sedimentation problems within the sump (pumping pit). The front of the sump seems to be getting shallower, but has not yet resulted in a major impediment to pumping operations. Riprap and emergency spillways functioned as planned this year during the third highest river flood recorded at this location.

Due to a mild winter, the pump was used into December. No problems were experienced with the electrical connections or phase converter. The planned guard to prevent the buildup of leaves was not constructed, but still needed. The pump was operated a total of 669 hours.

Public use did not seem to recover to levels experienced in the past. However, waterfowl use of the area also appeared to be reduced—perhaps due to the extensive flooding. Archery deer usage also appears to be declining. Two trappers were authorized for the area, and between the two harvested 23 raccoons, four muskrats, three beavers, one red fox, one coyote, and one river otter.

Considerable time was spent this year in mowing maple/cottonwood/willow invasion—primarily in the acorn and bare-root seedling plantings. We salvaged as many of the few surviving seedlings, and our plan is to establish RPM seedlings at a light stocking rate (around 10-15/acre), planted on individual elevated mounds. We also set back willow invasion along field edges in the south management unit (SMU). The original RPM planting is doing very well, and we completed some fieldwork in the north management unit (NMU) just south of this planting in preparation for additional RPM plantings of hard mast trees.

We had a good stand of smartweed and barnyard grass in the open areas of the SMU. Little waterfowl usage observed in the fall, especially later in the season (after mid-November). Tree berms in the SMU that were planted prior to the 2001 flood appear to have survived in good numbers, but the weed control mats collected enough sediment to eliminate their usefulness. A better estimate of tree survival will be made after leaf-out this spring. The large bare root stock seedlings planted as a comparison between these “super-seedlings” from our state nursery with RPM seedlings did not fare as well through the flood, but may go ahead and re-sprout from the roots this spring.

The bentonite blanket that showed so much promise last year has apparently failed. A substantial drop in water in the SMU was noted in November-December (dropped 0.06 feet/day), and the area pumped up again. Water levels declined again. A final pump-up was initiated, and the new water control gate closed to isolate the SMU from the water distribution channel—with the end result being a continued drop in water levels. At the time of inspection, the unit was essentially dry, except for low-lying areas. This is disturbing, and certainly complicates (if not eliminate) the option of doing moist-soil management work in this unit.

Management plans for 2002 include reseeding levees with redbud/brome; using a heavy brush-cutter to knock back buttonbush/willow invasion around some of the wooded sloughs; establishing/maintaining ladino/alsike clover plantings; and hopefully establishing around five acres of corn/milo food plots. As mentioned earlier, we also plan to construct mounds near the original RPM tree planting site in preparation of additional mast tree plantings—possibly even this fall if trees can be obtained.


Site Manager

APPENDIX B

References

REFERENCES:

- a.** *Definite Project Report (R-8) with Integrated Environmental Assessment, Bay Island Rehabilitation and Enhancement Project, Pool 22, River Miles 311-312, Upper Mississippi River, Marion County, Missouri, March 1990.* This report presents a detailed evaluation of alternatives to enhance wetland habitat for resident species and migratory waterfowl. Recommended alternatives include low elevation levees, stoplog structures, pump station, mast tree planting and access improvements. This report marks the conclusion of the planning process and serves as a basis for approval of the preparation of final plans and specifications and subsequent project construction
- b.** *Plans and Specifications, Bay Island, Pool 22, River Mile 311, Upper Mississippi River System, Environmental Management Program, Marion County, Missouri, Contract No. DACW25-91-C-0057.* These documents were prepared to provide sufficient detail to allow construction. Project features include two wetland management units surrounded by a 2-year event perimeter levee, water supply pump station, stoplog control structures, mast tree planting and an access road with bridge.
- c.** *Plans and Specifications, Post Flood Tree Replanting, Bay Island, Pool 22, River Mile 311, Upper Mississippi River System, Environmental Management Program, Marion County, Missouri, Contract No. DACW25-94-C-0073.*
- d.** *Operation and Maintenance Manual, Bay Island Rehabilitation and Enhancement Project, Upper Mississippi River Environmental Management Program, Pool 22, River Miles 311-312, Marion County, Missouri, November 1995 (O&M Manual).* This manual was prepared to serve as a guide for the operation and maintenance of the Bay Island project. Operation and maintenance instructions for major features of the project are presented.
- e.** *Post-Construction Initial Performance Evaluation Report (IPER4F), Bay Island Rehabilitation and Enhancement Project, Upper Mississippi River System Environmental Management Program, Pool 22, Mississippi River Miles 311-312, Marion County, Missouri, December 1999.*

APPENDIX C

Distribution List

EXTERNAL DISTRIBUTION:

Number of Copies

Mr. William Hartwig Regional Director, Region 3 U.S. Fish and Wildlife Service Federal Building, Ft. Snelling Twin Cities, MN 55111	1
Mr. Keith Beseke EMP Coordinator U.S. Fish and Wildlife Service Upper Mississippi Refuge Complex 51 East 4th Street, Room 101 Winona, MN 55987	1
Mr. Richard Nelson Field Supervisor U.S. Fish and Wildlife Service 4469 – 48 th Avenue Court Rock Island, IL 61201	1
Mr. Dick Steinbach U.S. Fish and Wildlife Service Mark Twain National Wildlife Refuge 1704 North 24th Street Quincy, IL 62301	1
Ms. Karen Westphall EMP Coordinator U.S. Fish and Wildlife Service 1704 North 24th Street Quincy, IL 62301	1
Mr. Keith Jackson Site Manager Missouri Department of Conservation 653 Clinic Road Hannibal, MO 63401	1
Dr. Ken Lubinski Environmental Management Technical Center 575 Lester Drive Onalaska, WI 54650	1

	Number of Copies
Mr. Jeremy Conn Resource Forester Missouri Department of Conservation 653 Clinic Road Hannibal, MO 63401	2
Mr. Shawn Cleary Missouri Department of Conservation Upper Missouri Wildlife Area P.O. Box 201 Elsberry, MO 63343	1
Mr. Gary Christoff Missouri Department of Conservation P.O. Box 180 Jefferson City, MO 65102	1
Ms. Holly Stoerker Upper Mississippi River Basin Association 415 Hamm Building 408 St. Peter Street St. Paul, MN 55111	1
Mr. Harlan Hirt U.S. Environmental Protection Agency, Region V 77 West Jackson Blvd. Chicago, IL 60604	1
Mr. Jack Boyles Wildlife Regional Supervisor Missouri Department of Conservation Northeast Region 2500 South Halliburton Kirksville, MO 63501	1
Mr. Art Suchland Forestry Regional Supervisor Missouri Department of Conservation Northeast Region 2500 South Halliburton Kirksville, MO 63501	1

Number of Copies

Mr. Scott Stuewe Office of Resource Conservation Illinois Department of Natural Resources 524 South Second Street Springfield, IL 62701-1787	1
Coordinator UMRCC 4469 – 48 th Avenue Court Rock Island, IL 61201	1
ATTN: CEMVP-PE-P (Donald Powell) U.S. Army Engineer District, St. Paul 190 - 5th Street East St. Paul, MN 55101-1638	1
ATTN: CEMVS-PM-N (Mike Thompson) U.S. Army Engineer District, St. Louis 1222 Spruce Street St. Louis, MO 63103-2833	1
ATTN: CEMVD-PD-G (Buddy Arnold) U.S. Army Engineer Division, Mississippi Valley Box 80 Vicksburg, MS 39181-0080	1
ATTN: CEMVD-ET-PR (Tom Pullen) U.S. Army Engineer Division, Mississippi Valley Box 80 Vicksburg, MS 39181-0080	1
ATTN: CEWES-ES-P (Steve Ashby) U.S. Army Engineer Waterways Experiment Station 3909 Halls Ferry Road Vicksburg, MS 39180-6199	1

INTERNAL DISTRIBUTION:

District Personal
U.S. Army Engineer District, Rock Island
Clock Tower Building - P.O. Box 2004
Rock Island, IL 61204-2004


ATTN:

	Number of Copies Final (hard-copy)
CEMVR-PM-M (File)	2
CEMVR-PM-M (Perk)	1
CEMVR-PM-M (Whitney)	1
CEMVR-PM-A (Barr)	1
CEMVR-PM-AR (Carmack)	1
CEMVR-ED-DN (File)	1
CEMVR-ED-DN (Ensey)	1
CEMVR-ED-DM (Sunderman)	1
CEMVR-IM-CL (Romic)	2


	Number of Copies Final (e-mail)
CEMVR-CD (Holmes)	1
CEMVR-DP (Loss)	1
CEMVR-ED (Raoul)	1
CEMVR-ED-D (Rossmiller)	1
CEMVR-ED-DG (Bartek)	1
CEMVR-ED-G (Mech)	1
CEMVR-ED-HH (Martens)	1
CEMVR-ED-H (Nanda)	1
CEMVR-ED-HQ (Beckert)	1
CEMVR-OD-MN (Swenson)	1
CEMVR-OD (Blanchar)	1

APPENDIX D

Plates

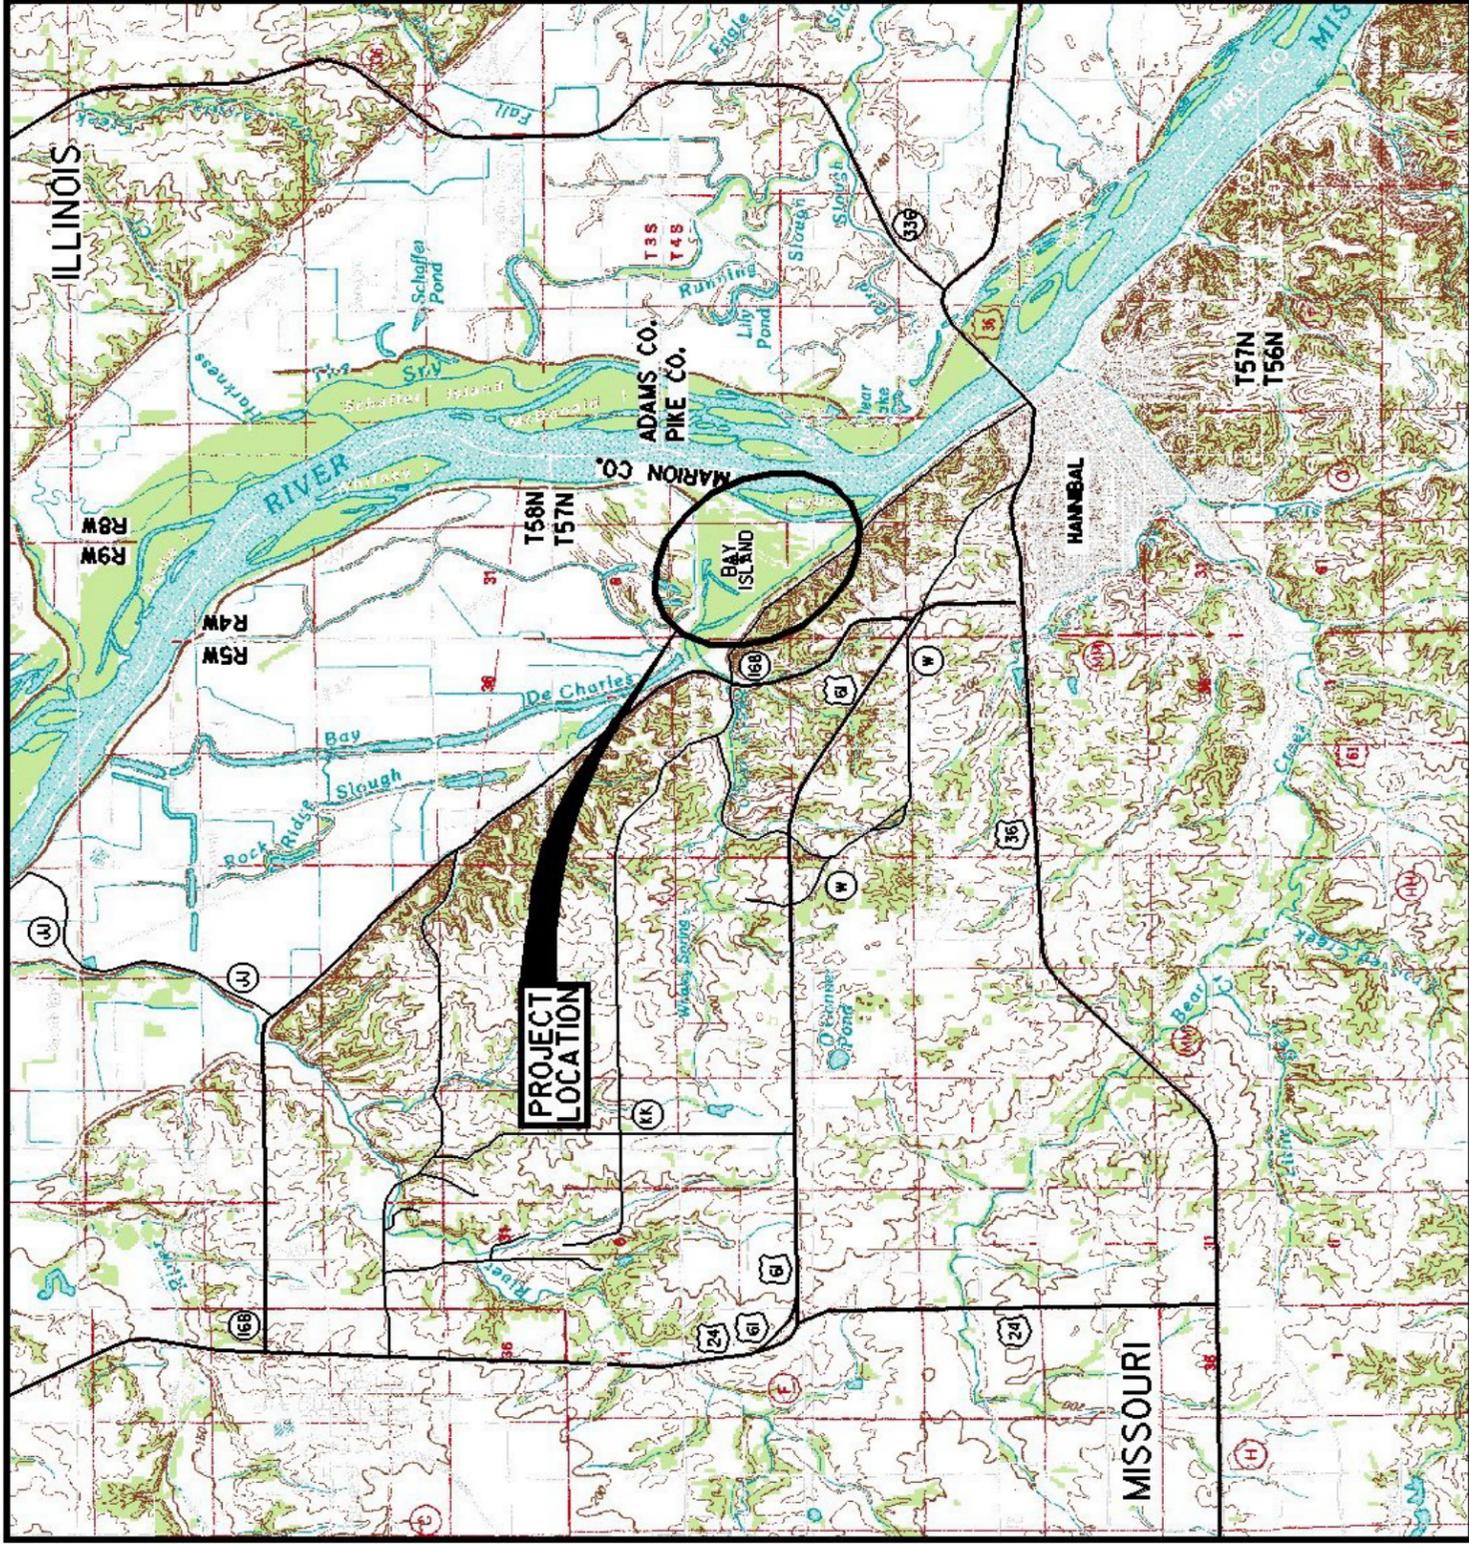

LOCATION PLAN
 0 0.25 0.50 0.75
 SCALE IN MILES

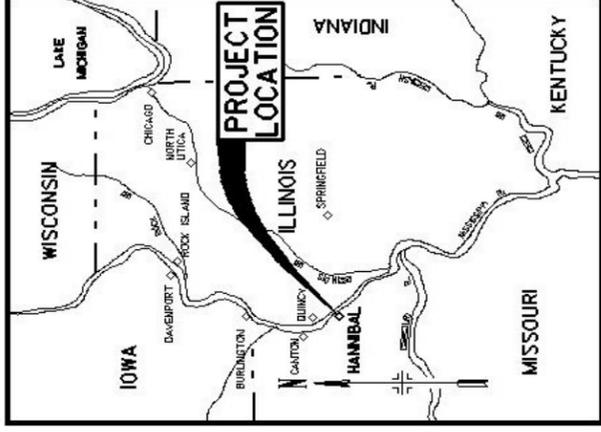

VICINITY MAP
 0 25 50 75
 SCALE IN MILES


SITE PLAN
 UPPER MISSISSIPPI RIVER SYSTEM
 ENVIRONMENTAL MANAGEMENT PROGRAM
 POOL 22, RIVER MILE 311
 BAY ISLAND, MISSOURI

U.S. ARMY ENGINEER DISTRICT CORPS OF ENGINEERS ROCK ISLAND, ILLINOIS	Drawn By: PLG Project Code: AS SHDN	Checked By: KJS Scale: 1"=40'	Reviewed By: BLK Revision Number: DACW25-00-9-0007
Date: 24 FEB 00	Designated By: HLM/KJS		

Symbol	Description	Date	Approved



PLATE 2

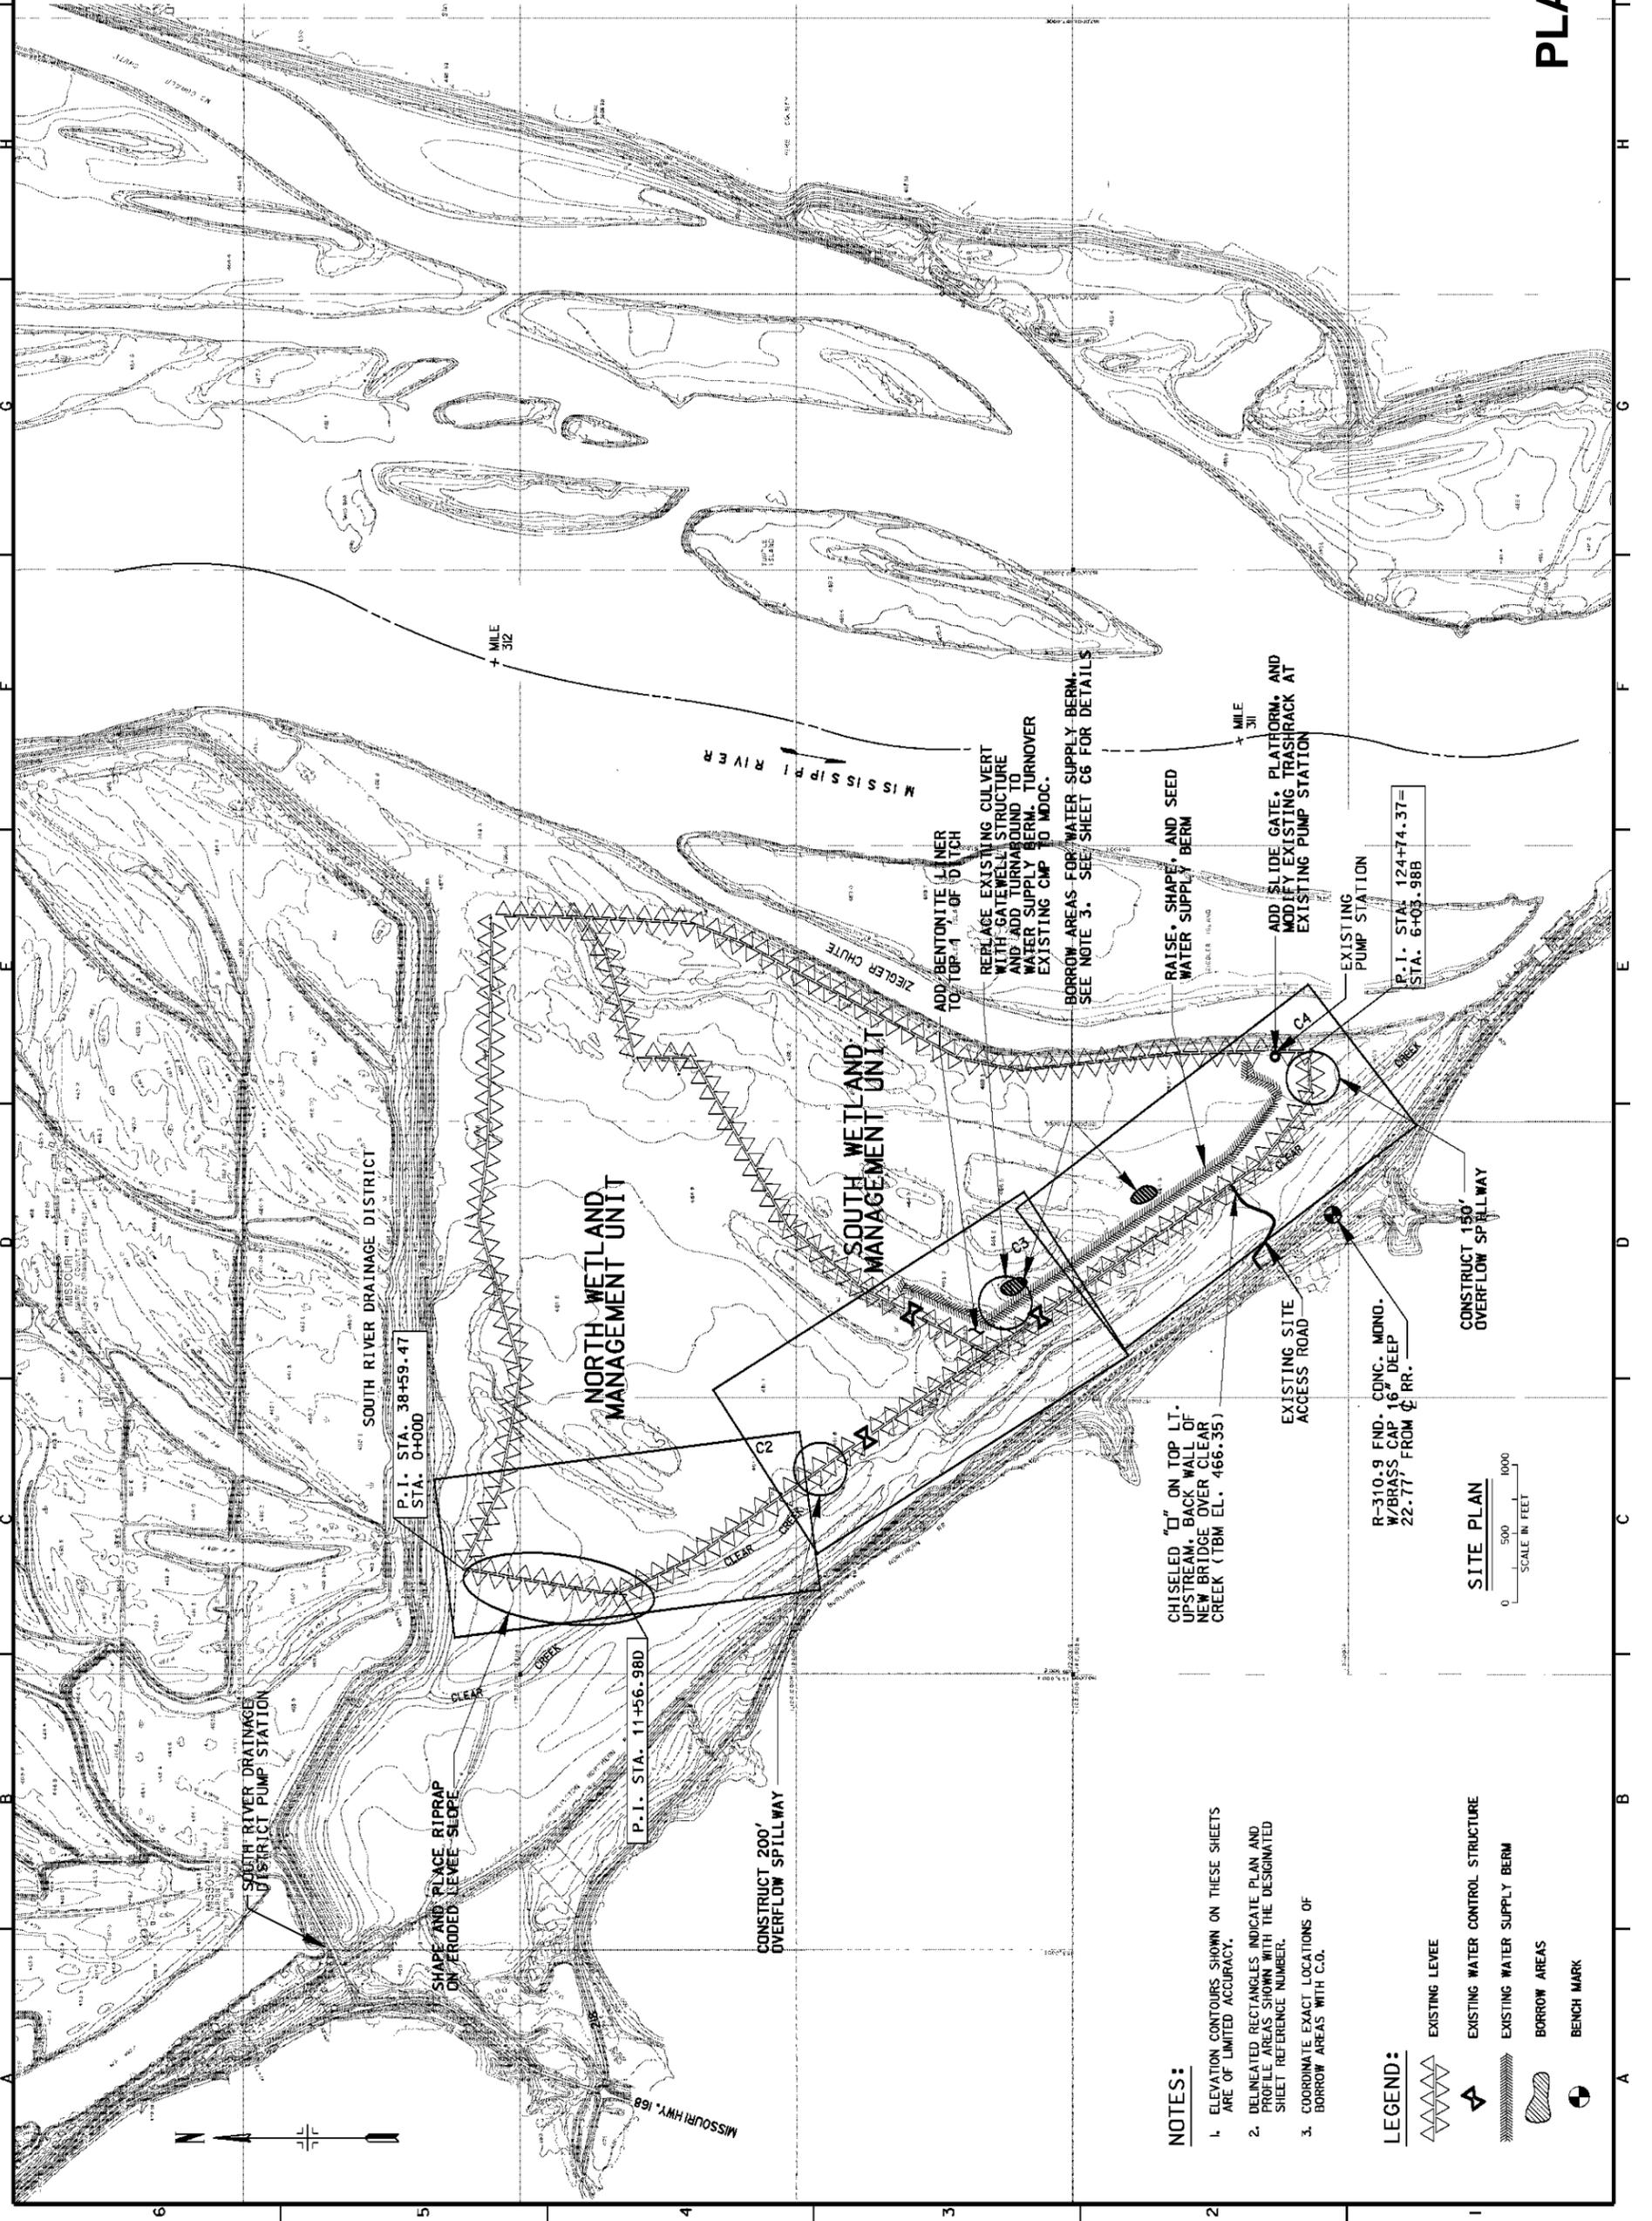

NOTES:

- ELEVATION CONTOURS SHOWN ON THESE SHEETS ARE OF LIMITED ACCURACY.
- DELINEATED RECTANGLES INDICATE PLAN AND PROFILE AREAS SHOWN WITH THE DESIGNATED SHEET REFERENCE NUMBER.
- COORDINATE EXACT LOCATIONS OF BORROW AREAS WITH C.O.

LEGEND:

- EXISTING LEVEE
- EXISTING WATER CONTROL STRUCTURE
- EXISTING WATER SUPPLY BERM
- BORROW AREAS
- BENCH MARK